




# BS / DIN Standard Roller Chain

## 표준형 로울러 체인[Ⅱ] : 유럽규격

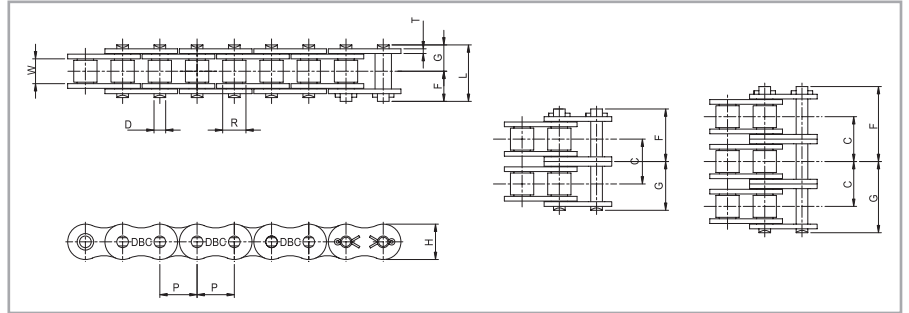

unit : mm

DONG BO Chain No.		Pitch	Inner Width	Roller Dia	Pin		Transverse pitch	Plate				Breaking Load
Standard Designation	BS CHAIN No.				P	W min		R max	D max	L max	C	
<b>DBC</b>	<b>06B-1</b>	9.525	5.72	6.35	3.28	13.5	10.24	1.00	1.30	8.26	8.26	910
	<b>06B-2</b>					23.8						1,730
	<b>06B-3</b>					34.0						2,540
<b>DBC</b>	<b>08B-1</b>	12.70	7.75	8.51	4.45	17.0	13.92	1.50	1.50	11.81	10.92	1,820
	<b>08B-2</b>					31.0						3,180
	<b>08B-3</b>					44.9						4,540
<b>DBC</b>	<b>10B-1</b>	15.875	9.65	10.16	5.08	19.6	16.59	1.50	1.50	14.73	13.72	2,270
	<b>10B-2</b>					36.2						4,540
	<b>10B-3</b>					52.8						6,810
<b>DBC</b>	<b>12B-1</b>	19.05	11.68	12.07	5.72	22.7	19.46	1.70	1.80	16.13	16.13	2,950
	<b>12B-2</b>					42.2						5,900
	<b>12B-3</b>					61.7						8,850
<b>DBC</b>	<b>16B-1</b>	25.40	17.02	15.88	8.28	36.1	31.88	3.20	4.0	21.08	21.08	6,130
	<b>16B-2</b>					68.0						10,820
	<b>16B-3</b>					99.9						16,330
<b>DBC</b>	<b>20B-1</b>	31.75	19.56	19.05	10.19	43.2	36.45	3.50	4.50	26.42	26.42	9,700
	<b>20B-2</b>					79.7						17,350
	<b>20B-3</b>					116.1						25,510
<b>DBC</b>	<b>24B-1</b>	38.10	25.40	25.40	14.63	53.4	48.36	5.20	6.0	33.40	33.40	16,330
	<b>24B-2</b>					101.8						28,580
	<b>24B-3</b>					150.0						43,370
<b>DBC</b>	<b>28B-1</b>	44.45	30.99	27.94	15.90	65.1	59.56	6.30	7.50	37.08	37.08	20,410
	<b>28B-2</b>					124.7						36,740
	<b>28B-3</b>					184.3						54,080
<b>DBC</b>	<b>32B-1</b>	50.80	30.99	29.21	17.81	67.4	58.55	6.30	7.0	42.29	42.29	25,510
	<b>32B-2</b>					126.0						45,920
	<b>32B-3</b>					184.5						68,370
<b>DBC</b>	<b>40B-1</b>	63.50	38.10	39.37	22.89	78.20	72.29	8.0	9.5	52.96	52.96	36,220
	<b>40B-2</b>					151.20						64,300
	<b>40B-3</b>					223.90						96,940
<b>DBC</b>	<b>48B-1</b>	76.20	45.72	48.26	29.24	98.70	91.21	10.0	12.0	63.88	63.88	57,140
	<b>48B-2</b>					190.00						103,040
	<b>48B-3</b>					281.60						228,570
<b>DBC</b>	<b>56B-1</b>	88.90	53.34	53.98	34.32	114.50	106.60	12.0	14.0	77.85	77.85	86,730
	<b>56B-2</b>					221.10						163,270
<b>DBC</b>	<b>64B-1</b>	101.60	60.96	63.50	39.40	126.80	119.89	14.0	16.0	90.17	90.17	114,290
	<b>64B-2</b>					247.00						204,080
<b>DBC</b>	<b>72B-1</b>	114.30	68.58	72.39	44.48	144.40	136.27	16.0	17.0	103.60	103.60	142,860