



Only CR050, CR070

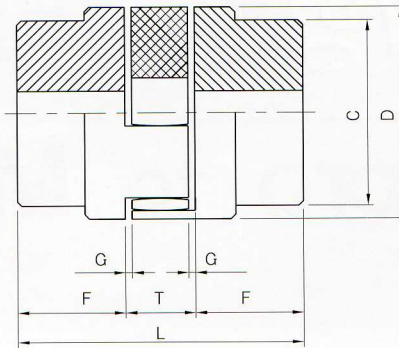

Only CR0010 ~ CR2035

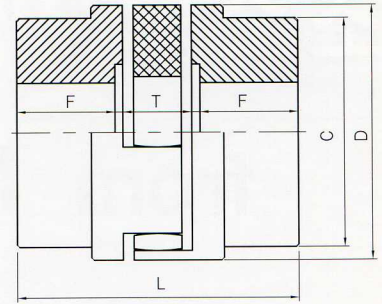

Only CR3545 ~ CR90100

## 표준품 규격 및 전동능력 / Dimensions & technical Data

Size	Bore Dia(mm)		Basic Torque (kg · m)	Torsion angle	Dimensions(mm)						
	min	max			C	D	F	T	L	G	중량
CR 050	5	11	0.4	3.2°	-	25	12	11	35	1	0.08
CR 070	7	14	1		-	35	18.5	13	50	1.5	0.3
CR 0010	11	19	2.5		42	48	24	17	65	1.5	0.5
CR 0020	14	24	3.4		50	58	27	18	72	1.5	0.9
CR 2035-A	19	28	12		58	68	35	20	90	1.5	1.3
CR 2035	19	38	32		68	78	35	22	92	1.5	2.5
CR 3545	28	45	65		88	98	38.5	29	106	4	4.4
CR 4560	38	60	90		98	118	45	30	120	3	7.8
CR 6070	42	75	125		115	135	46	33	125	3.5	10
CR 7080	65	100	293		130	160	66	45	177	5	19.5
CR 8090	65	110	720		150	200	105	45	255	5	36
CR 90100	65	110	990		180	230	110	55	270	6	39

## 특수형 / Space Type

1. 축간 거리가 넓어 Coupling Hub로 연결이 불가능한 경우.

1. When it is impossible to connect with only hubs because of long distance between shaft ends.

