

Double plus Chains

배속 체인

* For<Lube-Free Type>, please Consult directly Dongbo chain.




* 무급유형 배속체인은 사용자 요청에 의한 별도주문 제작사양 입니다.

Standard Double plus Chain 표준형 배속체인

Ring Type



Flange Type

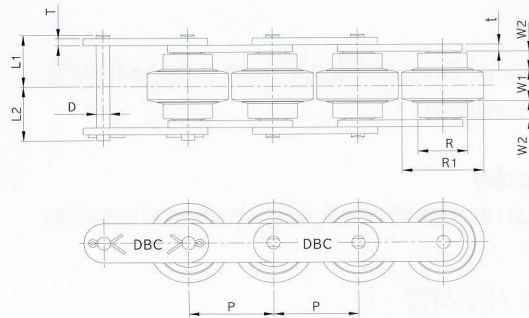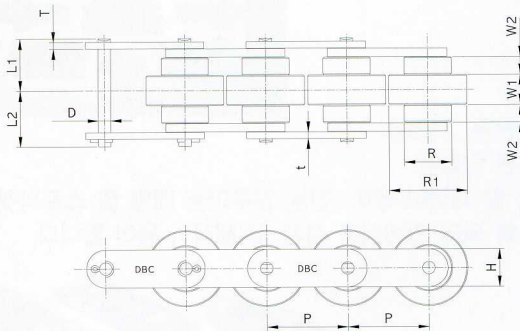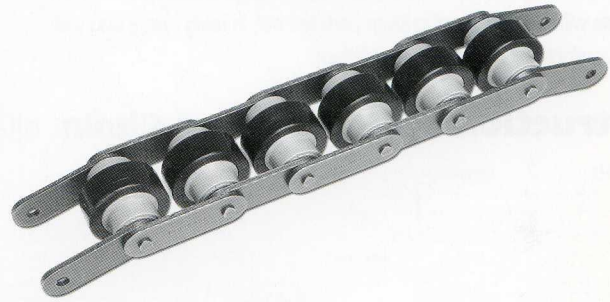

unit : mm

DONG BO Chain No.	Pitch P	Roller		Width		Plate			Pin			Approx. Weight (kg/m)		Link / unit SSR*	
		R	R1	W1	W2	t	T	H	D	L1	L2	VRP	VR		
DBC 2030VRP	-	19.05	11.91	18.3	7.8	4.1	1.27	1.27	9	3.3	11.4	13	0.6	-	160
DBC 2040VRP*	2040VR*	25.4	15.88	24.6	10.3	5.7	2.0	1.5	12.0	3.97	15.65	17.85	1.0	2.5	150
DBC 2050VRP	2050VR	31.75	19.05	30.6	13.0	7.1	2.4	2.0	15.0	5.08	19.5	21.0	1.4	3.7	120
DBC 2060VRP	2060VR	38.1	22.23	36.6	14.5	8.5	4.0	3.2	18.1	5.96	24.9	26.9	2.3	5.9	100
DBC 2080VRP	2080VR	50.8	28.58	48.0	20.0	15.0	4.0	4.0	24.1	7.93	35.8	36.9	4.2	10.5	74

* VRP = Double plus chain with plastic roller VR= Double plus chain with steel roller

주) 2040, 2050 배속체인은 Ring Type으로 2060이상은 Flange Type으로 제작 됩니다.

Note) Ring Type roller will be provided for 2040 & 2050 VRP/VR and Flange Type for 2060 and larger.

* Nos VRor VRP = Lube-Free Type double plus chain

Lube-Free Type 체인은 Nos 2040 VRP 또는 VR로 표기 됩니다.